

HSS 150

High Current Probe up to 50 A
Plug-in Test Probe

Grid:




≥ 5,08 mm

≥ 200 Mil

Installation height with KS: 10,8 mm (.425)

Recommended stroke: 4,4 mm (.173)

Mounting and functional dimensions

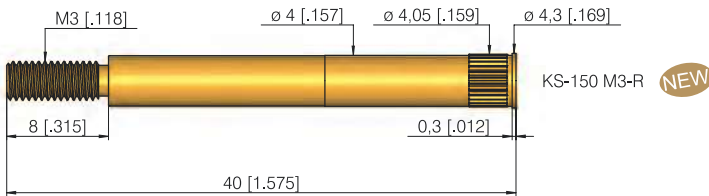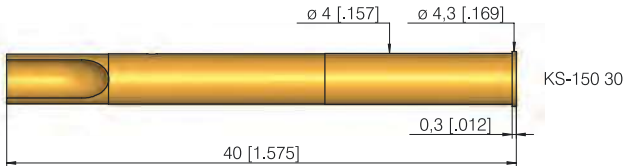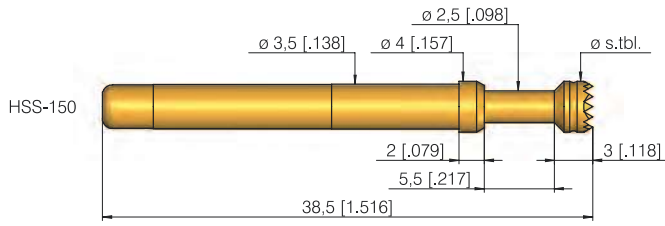

Available tip styles

Material	Tip style	Plating	Further versions	
			∅	∅ (inch)
3 02		A	∅ 4,00 (.157)	
3 03		A	∅ 4,00 (.157)	
3 05*		S	∅ 4,00 (.157)	
3 06		A	∅ 4,00 (.157)	3,00 (.118)
3 17		A	∅ 3,00 (.118)	
3 19		A	∅ 4,00 (.157)	

* pressed-in silver stud

Compatible GKS

GKS-854 (assembled in same receptacle)

Materials

Plunger: BeCu, gold-plated or silver stud
Barrel: Brass, silver-plated
Spring: Stainless steel, gold-plated
Receptacle: Brass, gold-plated

Operating temperature

Standard: -100° up to +200° C



Mounting hole size

for KS-150:
in CEM1 and FR4: ∅ 3,98 - 3,99 mm (.1567 - .1571)

for KS-150 M3-R:
in CEM1 and FR4: ∅ 4,00 - 4,02 mm (.1575 - .1583)


Electrical data

Current rating (at room temp.): max. 50 A
R_j typical: < 10 mΩ

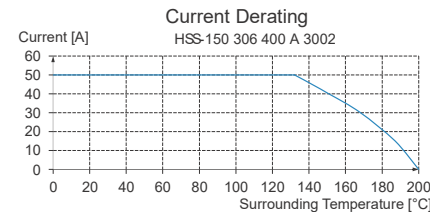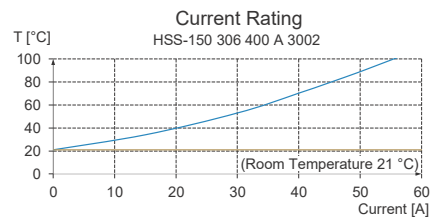


Mechanical data

Working stroke: 4,4 mm (.173)
Maximum stroke: 5,5 mm (.217)
Spring force at work, stroke: 3,0 N (10.8oz)
Alternative: 5,0 N (18.1oz); 10 N (36 oz) ("99" in order number)

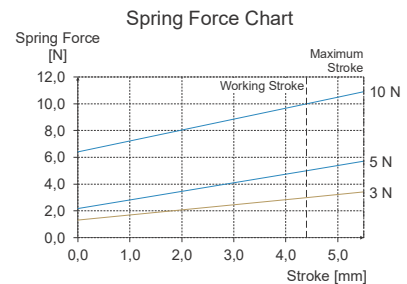

Ordering example

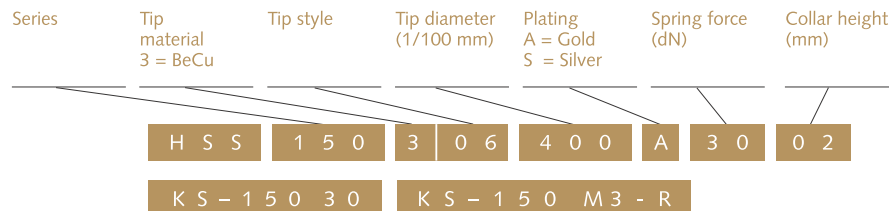

Test probe:

Receptacles: